

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
22 September 2005 (22.09.2005)

PCT

(10) International Publication Number
WO 2005/087535 A1

(51) International Patent Classification⁷: **B60N 2/44**

(21) International Application Number:
PCT/CA2005/000402

(22) International Filing Date: 17 March 2005 (17.03.2005)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/553,818 17 March 2004 (17.03.2004) US

(71) Applicant (for all designated States except US): **INTIER
AUTOMOTIVE INC.** [CA/CA]; 521 Newpark Boulevard,
Newmarket, Ontario L3Y 4X7 (CA).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **WEBER, James**
[US/US]; 5810 Perrytown, West Bloomfield, MI 48322
(US).

(74) Agents: **IMAI, Jeffrey, T.** et al.; Magna International Inc.,
337 Magna Drive, Aurora, Ontario L4G 7K1 (CA).


(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:
— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: REMOVABLE BOLSTER FOR ISOFIX

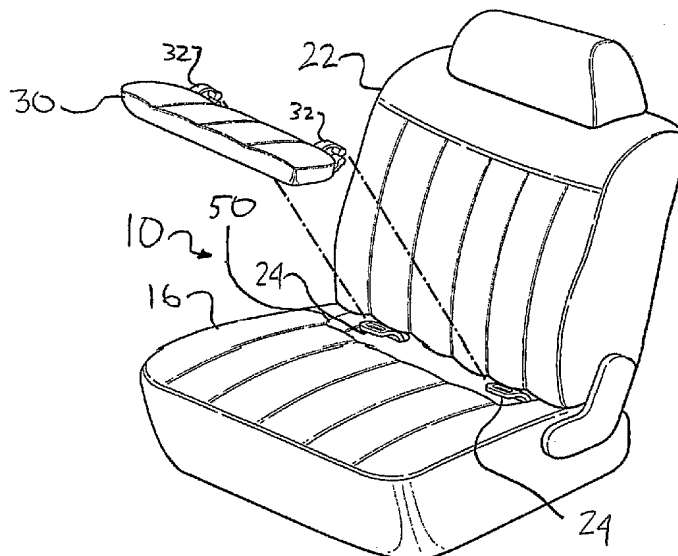

(57) **Abstract:** A seat assembly for a motor vehicle includes a frame that is fixedly secured to the motor vehicle. A seat cushion is secured to the frame. The seat cushion defines a seat width. A seatback is secured to the frame and is pivotal with respect to the seat cushion. A loop fastener is fixedly secured to the frame and extends between the seat cushion and the seatback. The loop fastener selectively receives a child seat latch therethrough to secure a child seat to the seat assembly. The seat assembly also includes a removable bolster that is selectively securable to the loop fastener. The removable bolster covers the loop fastener when the child seat is removed from the seat assembly. Therefore, the occupants of the seat assembly will contact the removable bolster and be prevented from feeling the loop fastener when sitting on the seat assembly.

WO 2005/087535 A1